

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER : 04131779
PUBLICATION DATE : 06-05-92


APPLICATION DATE : 25-09-90
APPLICATION NUMBER : 02254492

APPLICANT : FUJI ELECTRIC CO LTD;

INVENTOR : OKAMURA KOICHI;

INT.CL. : G01R 31/36 H02J 7/00 H02J 7/04

TITLE : BATTERY FAILURE SENSING DEVICE

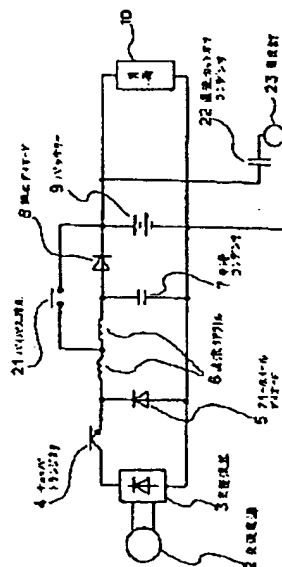

ABSTRACT : PURPOSE: To find failure in a battery, which is to be charged, in an early stage by charging the battery with a current including a large quantity of ripple components, and sensing change in the internal impedance of the battery as the amount of voltage drop through a DC cutoff capacitor.

CONSTITUTION: A battery failure sensing device concerned is equipped with a smoother circuit comprising a DC power supply 3 giving a DC output with a desired voltage through the on/off operation of a switching element 4, a battery 9 to be charged, a DC reactor 6, and a smoothing capacitor 7. If therein a bypass contact 21 is closed while an uninterruptive power supply is in operation, the battery 9 is charged with a current including a large quantity of ripple components given out of a chopper transistor 4. Accordingly the AC internal impedance has been changed even though the battery 9 is in its early period of degradation, so that the voltage fall is taken out through a DC cutoff capacitor 22 and measured by a voltmeter 23. Thus the degree of degradation can be sensed in an early stage.

COPYRIGHT: (C) JPO